

Fixture Number				
Project Title		Type		Qty
Comments				



CH725 | Bennington

- (6) Short White Acrylic Outer Diffuser with Bottom Lenses
- (1) Tall Center Diffuser with Bottom Lens
- Downlight Version with Bottom Cutout & Reflector (Downlight In Center Diffuser Only)
- Top & Bottom Rings, Metal Cross Accents
- Center Stem to 45° Swivel Canopy

Dimensions and Lamping:

CH725-48 48" A x 72" B x 36" C x 10" / 12" D Weight: 65 lbs.*
LN LED: Nominal 180W, 15000 Delivered Lumens
LD LED + Downlight: Nominal 215W, 19400 Delivered Lumens

*Structural support independent of the junction box is required.

LED Color Temperature:

35K 3500K **30K** 3000K **40K** 4000K

Control:

CLV Integral Power Supply, 0-10V Dimming to 1%

Voltage:

1 120V **2** 277V **MV** Multi-Volt

Diffusers:

WA Gloss White Acrylic
WM Matte White Acrylic

Standard Finishes:

PAL Aluminum	PSB Satin Black	PRD Traffic Red (RAL 3020)
PNL Nickel	PBB Brushed Brass	POR Pure Orange (RAL 2004)
PBR Bronze	PAB Antique Brass	PYL Traffic Yellow (RAL 1023)
PLB Light Bronze	PHB Hammered Bronze	PGR Emerald Green (RAL 6001)
PMB Medium Bronze	PHC Hammered Copper	PBL Signal Blue (RAL 5005)
PDB Dark Bronze	PHS Hammered Silver	STBD To Be Determined
PRB Oil Rubbed Bronze	PSG Satin Gold	
PMW Matte White	PPA Patina	

Premium Finishes:


BA Brushed Aluminum	BB Brushed Brass	PTBD To Be Determined
SN Satin Nickel	PB Polished Brass	
PC Polished Chrome	AB Antique Brass	

Hanging Options:

ST Stem **CH** Chain Hung with Power Cord

Other Options:

OAH Overall Height (Specify in Comments) **REM** Remote Emergency Power Supply (Stem Only)
2C 2-Circuit Wiring

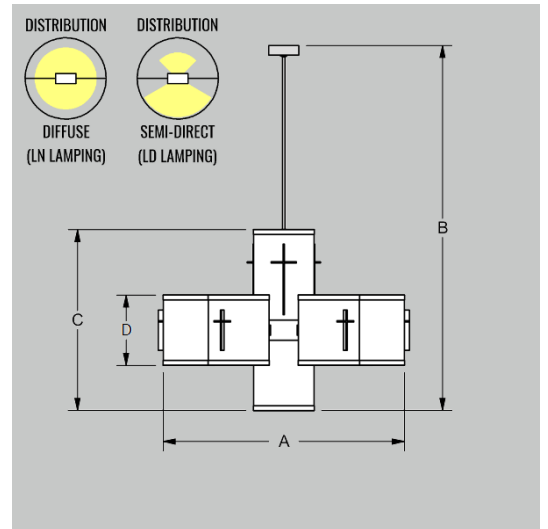

Notes:

- Custom sizes and finishes available upon request.
- Camman reserves the right to make design changes without prior notice.
- Mounting is to a 4 inch octagonal junction box.
- Structural support independent of the junction box is required.
- Photometric information is available at cammanlighting.com.