

Fixture Number				
Project Title		Type		Qty
Comments				



## P2449 | Roxy

- Matte White Acrylic Diffuser with Translucent Overlay Options
- Multiple Cable Hanging Options Available
- Driver(s) in Canopy

### Dimensions and Lamping:

<b>P2449-24</b>	24" A x 192" B x 4" C x 4" D	Weight: 16 lbs.
<b>LN</b>	LED: Nominal 30W, 4075 Delivered Lumens	
<b>LH</b>	LED: Nominal 65W, 7625 Delivered Lumens	
<b>P2449-36</b>	36" A x 192" B x 4" C x 4" D	Weight: 21 lbs.
<b>LN</b>	LED: Nominal 45W, 5950 Delivered Lumens	
<b>LH</b>	LED: Nominal 95W, 11875 Delivered Lumens	
<b>P2449-48</b>	48" A x 192" B x 4" C x 4" D	Weight: 26 lbs.
<b>LN</b>	LED: Nominal 60W, 8200 Delivered Lumens	
<b>LH</b>	LED: Nominal 125W, 15850 Delivered Lumens	
<b>P2449-60</b>	60" A x 192" B x 4" C x 4" D	Weight: 31 lbs.
<b>LN</b>	LED: Nominal 75W, 9925 Delivered Lumens	
<b>LH</b>	LED: Nominal 155W, 19825 Delivered Lumens	

### LED Color Temperature:

35K	3500K	30K	3000K	40K	4000K
-----	-------	-----	-------	-----	-------

### Control:

CLV Integral Power Supply, 0-10V Dimming to 1%

### Voltage:

1	120V	2	277V	MV	Multi-Volt
---	------	---	------	----	------------

### Diffusers:

- WM:** Matte White Acrylic  
**WMO:** Matte White Acrylic with Outside Overlay (Approx. 26% Reduction in Delivered Lumens)  
**WMI:** Matte White Acrylic with Inside Overlay (Approx. 19% Reduction in Delivered Lumens)  
**WMB:** Matte White Acrylic with Inside & Outside Overlay (Approx. 46% Reduction in Delivered Lumens)

### Transparent Overlay Options:

<b>ORR</b> Regal Red	<b>OTG</b> Teal Green	<b>OLW</b> Linen: White
<b>OBO</b> Burnt Orange	<b>OPB</b> Process Blue	<b>OCT</b> Canvas: Tan
<b>OYL</b> Yellow	<b>OIN</b> Indigo	<b>OTBD</b> To Be Determined
<b>OGR</b> Kentucky Bluegrass	<b>OBV</b> Bright Violet	

### Standard Finishes:

<b>PAL</b> Aluminum	<b>PSB</b> Satin Black	<b>PRD</b> Traffic Red (RAL 3020)
<b>PNL</b> Nickel	<b>PBB</b> Brushed Brass	<b>POR</b> Pure Orange (RAL 2004)
<b>PBR</b> Bronze	<b>PAB</b> Antique Brass	<b>PYL</b> Traffic Yellow (RAL 1023)
<b>PLB</b> Light Bronze	<b>PHB</b> Hammered Bronze	<b>PGR</b> Emerald Green (RAL 6001)
<b>PMB</b> Medium Bronze	<b>PHC</b> Hammered Copper	<b>PBL</b> Signal Blue (RAL 5005)
<b>PDB</b> Dark Bronze	<b>PHS</b> Hammered Silver	<b>STBD</b> To Be Determined
<b>PRB</b> Oil Rubbed Bronze	<b>PSG</b> Satin Gold	
<b>PMW</b> Matte White	<b>PPA</b> Patina	



### Hanging Options:

<b>ACH</b> Hub to Canopy	<b>ACC</b> Cables to Canopy	<b>ACM</b> Multiple Vertical Cables
--------------------------	-----------------------------	-------------------------------------



### Other Options:

<b>OAH</b> Overall Height (Specify in Comments)	<b>REM</b> Remote Emergency Power Supply
---	--

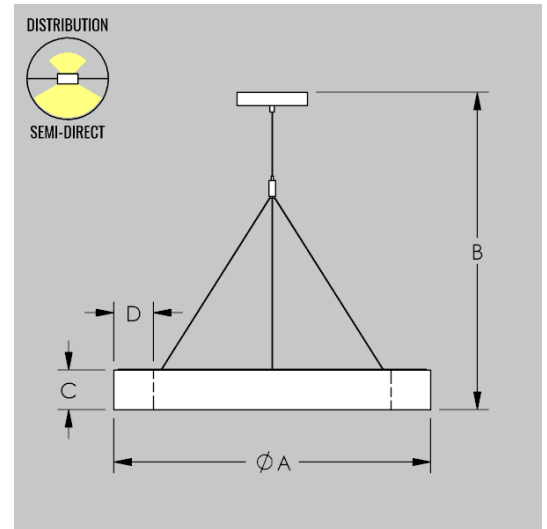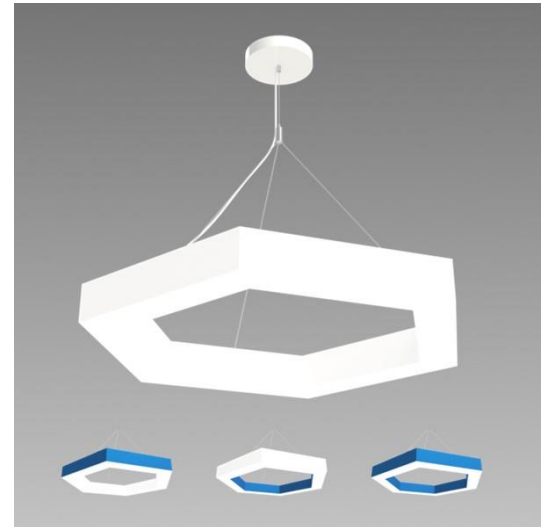

### Notes:

- Custom sizes and finishes available upon request.
- Camman reserves the right to make design changes without prior notice.
- Mounting is to a 4 inch octagonal junction box.
- Photometric information is available at [cammanlighting.com](http://cammanlighting.com). Overlay options affect lumen output and distribution; overlay versions of IES files are included.

R08.19.20