

Fixture Number				
Project Title		Type		Qty
Comments				



## W5115 | Augusta

- Matte White Poly Globe
- Single Arm to Backplate

### Dimensions and Lamping:

<b>W5115-12</b>	12" A x 24" B x 12" C	Weight: 8 lbs.
<b>LN</b>	LED: Nominal 9W, 825 Delivered Lumens	
<b>LH</b>	LED: Nominal 16W, 1475 Delivered Lumens	
<b>W5115-14</b>	14" A x 30" B x 14" C	Weight: 11 lbs.
<b>LN</b>	LED: Nominal 12W, 1125 Delivered Lumens	
<b>LH</b>	LED: Nominal 22W, 2025 Delivered Lumens	
<b>W5115-16</b>	16" A x 36" B x 16" C	Weight: 14 lbs.
<b>LN</b>	LED: Nominal 16W, 1475 Delivered Lumens	
<b>LH</b>	LED: Nominal 30W, 2650 Delivered Lumens	
<b>W5115-18</b>	18" A x 48" B x 18" C	Weight: 16 lbs.
<b>LN</b>	LED: Nominal 20W, 1875 Delivered Lumens	
<b>LH</b>	LED: Nominal 40W, 3350 Delivered Lumens	

### LED Color Temperature:

35K	3500K	30K	3000K	40K	4000K
-----	-------	-----	-------	-----	-------

### Control:

CLV: Integral Power Supply, 0-10V Dimming to 1%

### Voltage:

1	120V	2	277V	MV	Multi-Volt
---	------	---	------	----	------------

### Standard Finishes:



<b>PAL</b>	Aluminum	<b>PSB</b>	Satin Black	<b>PRD</b>	Traffic Red (RAL 3020)
<b>PNL</b>	Nickel	<b>PBB</b>	Brushed Brass	<b>POR</b>	Pure Orange (RAL 2004)
<b>PBR</b>	Bronze	<b>PAB</b>	Antique Brass	<b>PYL</b>	Traffic Yellow (RAL 1023)
<b>PLB</b>	Light Bronze	<b>PHB</b>	Hammered Bronze	<b>PGR</b>	Emerald Green (RAL 6001)
<b>PMB</b>	Medium Bronze	<b>PHC</b>	Hammered Copper	<b>PBL</b>	Signal Blue (RAL 5005)
<b>PDB</b>	Dark Bronze	<b>PHS</b>	Hammered Silver	<b>STBD</b>	To Be Determined
<b>PRB</b>	Oil Rubbed Bronze	<b>PSG</b>	Satin Gold		
<b>PMW</b>	Matte White	<b>PPA</b>	Patina		

### Premium Finishes:

<b>BA</b>	Brushed Aluminum	<b>PB</b>	Polished Brass
<b>SN</b>	Satin Nickel	<b>AB</b>	Antique Brass
<b>PC</b>	Polished Chrome	<b>PTBD</b>	To Be Determined
<b>BB</b>	Brushed Brass		

### Other Options:

REM Remote Emergency Power Supply

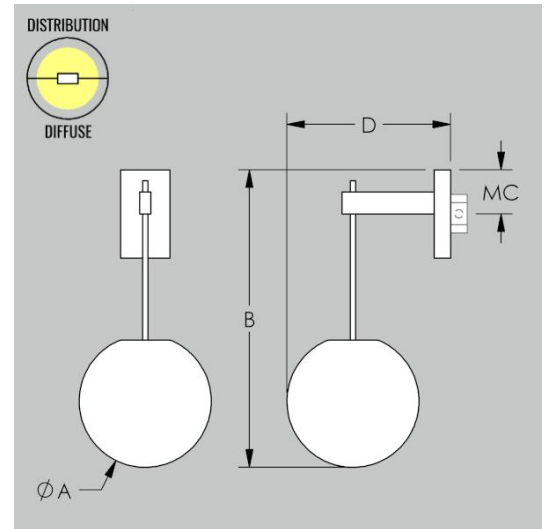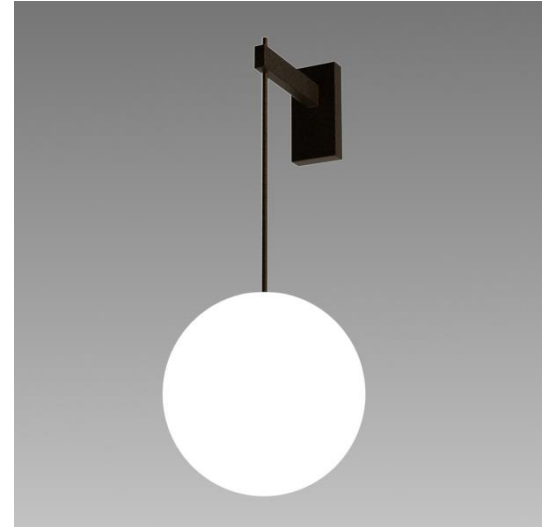

### Notes:

- Custom sizes and finishes available upon request.
- Camman reserves the right to make design changes without prior notice.
- Mounting is to a 4 inch octagonal junction box.
- Photometric information is available at [cammanlighting.com](http://cammanlighting.com)