

Fixture Number				
Project Title		Type		Qty
Comments				



## P520 | Pike

- White Acrylic Diffuser & Bottom Lens
- Downlight Version with Opening & Reflector
- Vertical Metal Bars, Horizontal Metal Accents
- Center Stem to 45° Swivel Canopy

### Dimensions and Lamping:

**P520-24** 14"A x 48"B x 24"C Weight: 20 lbs.  
**LN** LED: Nominal 40W, 2850 Delivered Lumens  
**LD** LED + Downlight: Nominal 65W, 4950 Delivered Lumens

**P520-30** 14"A x 54"B x 30"C Weight: 26 lbs.  
**LN** LED: Nominal 55W, 4150 Delivered Lumens  
**LD** LED + Downlight: Nominal 90W, 6900 Delivered Lumens

**P520-36** 14"A x 60"B x 36"C Weight: 33 lbs.  
**LN** LED: Nominal 70W, 5300 Delivered Lumens  
**LD** LED + Downlight: Nominal 105W, 8200 Delivered Lumens

### LED Color Temperature:

**35K** 3500K **30K** 3000K **40K** 4000K

### Downlight Optics:

**BN** Narrow Beam (~20°) **BW** Wide Beam (~50°)  
**BM** Medium Beam (~30°) **BX** Extra Wide Beam (~90°)

### Control:

**CLV** Integral Power Supply, 0-10V Dimming to 1%

### Voltage:

**1** 120V **2** 277V **MV** Multi-Volt

### Diffusers:

**WA** Gloss White Acrylic  
**WM** Matte White Acrylic

### Standard Finishes:

<b>PAL</b> Aluminum	<b>PSB</b> Satin Black	<b>PRD</b> Traffic Red (RAL 3020)
<b>PNL</b> Nickel	<b>PBB</b> Brushed Brass	<b>POR</b> Pure Orange (RAL 2004)
<b>PBR</b> Bronze	<b>PAB</b> Antique Brass	<b>PYL</b> Traffic Yellow (RAL 1023)
<b>PLB</b> Light Bronze	<b>PHB</b> Hammered Bronze	<b>PGR</b> Emerald Green (RAL 6001)
<b>PMB</b> Medium Bronze	<b>PHC</b> Hammered Copper	<b>PBL</b> Signal Blue (RAL 5005)
<b>PDB</b> Dark Bronze	<b>PHS</b> Hammered Silver	<b>STBD</b> To Be Determined
<b>PRB</b> Oil Rubbed Bronze	<b>PSG</b> Satin Gold	
<b>PMW</b> Matte White	<b>PPA</b> Patina	

### Premium Finishes:


<b>BA</b> Brushed Aluminum	<b>BB</b> Brushed Brass	<b>PTBD</b> To Be Determined
<b>SN</b> Satin Nickel	<b>PB</b> Polished Brass	
<b>PC</b> Polished Chrome	<b>AB</b> Antique Brass	

### Hanging Options:

**ST** Stem

### Other Options:

<b>OAH</b> Overall Height (Specify in Comments)	<b>REM</b> Remote Emergency Power Supply (24" Size)
<b>2C</b> 2-Circuit Wiring	<b>IEM</b> Integral Emergency Power Supply (30" & 36" Sizes)

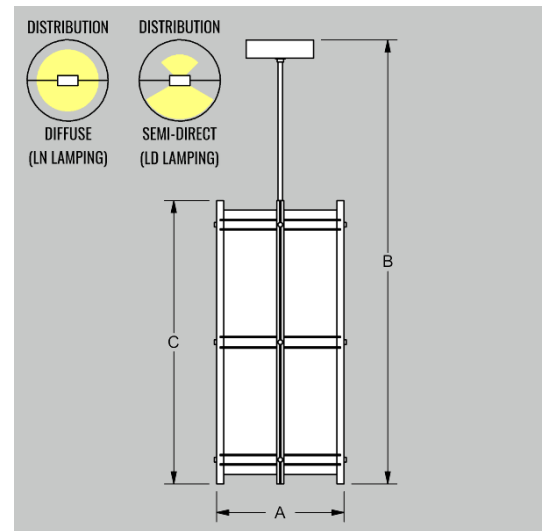

### Notes:

- Custom sizes and finishes available upon request.
- Camman reserves the right to make design changes without prior notice.
- Mounting is to a 4 inch octagonal junction box.
- Photometric information is available at [cammanlighting.com](http://cammanlighting.com)